

SE RANGE

The **SE Range** Mulcher fit excavators from **0.8 to 4.0 tons**. It is characterized by a symmetrical design, allowing the use on both sides, speeding up the cutting phase. The compact design allows to reach inaccessible places. Thanks to the integrated multifunction valve block, the mulcher does not require a drainage pipe up to 10 BAR maximum counter-pressure.




STANDARD TECHNICAL FEATURES

- Direct transmission
- Spiral-mounted tools for a better cutting performance
- Flow control valve - shock proof valve – anti-cavitation valve – max pressure (it does not require drainage pipe)
- Shaft with hammers or Y blades
- Engine housing protection
- Protection devices in compliance to current European Regulation according to CE norms.

MODEL		SE60	SE80	SE100
Machine	(ton)	0.8/1.8	1.8/3.0	3.0/4.0
Oil flow rate	(l/min)	12/24	18/35	25/40
Max Pressure	(bar)	250	250	250
A	(mm)	800	1000	1200
B	(mm)	675	675	675
C	(mm)	320	320	320
D (Total Cutting Width)	(mm)	600	800	1000
Weight	(Kg)	85	100	115
Transmission		direct	direct	direct
Blades/Hammers Std	(n°)	12	16	20
Ø cutting (Max)	(cm)	4	4	4
Price	£	2136,00	2252,00	2369,00

Mulchers - SE range

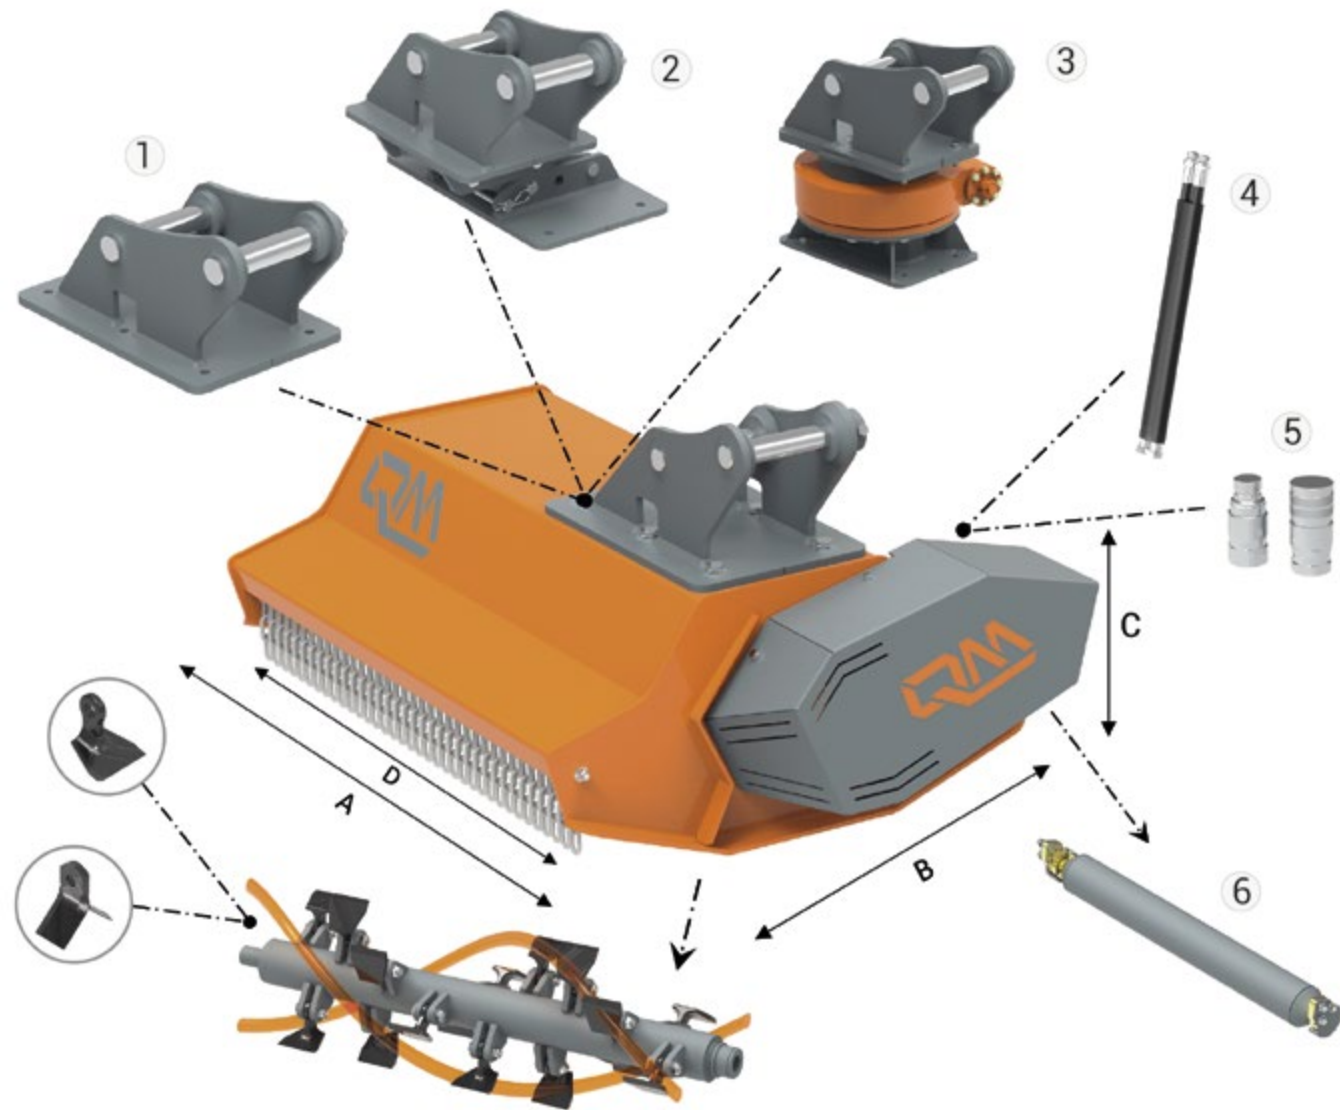

OPTIONAL

1	DIRECT COUPLING (pins)	£	4	HYDRAULIC LINE KIT *	£
	Excavators 0.8 / 1.8 ton	200,00		Pipe 3/8" L=1500mm	89,00
	Excavators 1.8 / 3.0 ton	215,00		Pipe 1/2" L=1500mm	106,00
	Excavators 3.0 / 4.0 ton	239,00			
2	FLOATING	£	5	FACCIA PIANA QUICK COUPLINGS **	£
	AF1 - Kg22	279,00		Connection size 3/8"	60,00
				Connection size 1/2"	82,00
3	KIT IDRAULIC ROTATION	£	6	SUPPORT ROLLER	£
	Hydraulic Rotation	2325,00		Roller with holding devices	195,00

* On demand it is possible to provide different lengths out of standard ones
 ** On demand it is possible to provide other quick couplings than those indicated above
 All data are intended WITHOUT ATTACHMENT TO THE MACHINE