

SF RANGE



SF Mulcher can be applied to Skid Loaders and Wheel Loaders with universal front attachment SAE J2513. The resistant and robust body, thanks also to the wear-resistant interchangeable slides, make it suitable for professional work. It is equipped with the "shockproof", "anti-cavitation" and "pressure control and limitation" valve group. It can be equipped with hammers or Y-shaped blades with intermediate.




STANDARD TECHNICAL FEATURES

- Compact and robust design
- Frame with double cavity bottom, reinforced up to the point of connection with the front chains for greater impact resistance
- Spherical roller bearings better protected from impurities thanks to a labyrinth of special seals.
- Mechanical side shifting - both sides (Starting from SF160 SF185 SF210)
- Shaft with blades or hammers with fixed supports for a better shredding of the materials.
- Spiral-mounted tools for a better cutting performance
- Toothed V-belt transmission with customizable transmission ratio
- Flow control valve - shock proof valve – anti-cavitation valve – max pressure (it does not require drainage pipe)
- The shaft can be equipped with hammers or Y-shaped blades
- Internal toothed bar that helps to chop the material
- Rear blade in rubberized, multi-layered, and tear-proof canvas
- Support roller with through shaft for greater resistance
- Wear-resistant and replaceable slides
- Hydraulic Pipes L= 2000
- Protection devices in compliance to current European Regulation according to CE norms.

MODEL		SF100	SF120	SF160	SF185	SF210
Oil flow rate	lt min/max	25/40	30/50	60/110	70/120	90/140
Max Pressure	bar	250	250	210	210	210
A	mm	1200	1400	1790	2040	2290
B	mm	870	870	1270	1270	1270
C	mm	435	435	750	750	750
D (Total Cutting Width)	mm	1000	1200	1600	1850	2100
Weight	kg	160	190	755	830	890
Transmission		Direct	Direct	3 Belts	3 Belts	3 Belts
Tools	n°	20	24	16	18	20
Price	£	4553,00	4760,00	7285,00	7970,00	8643,00

Mulchers - SF range

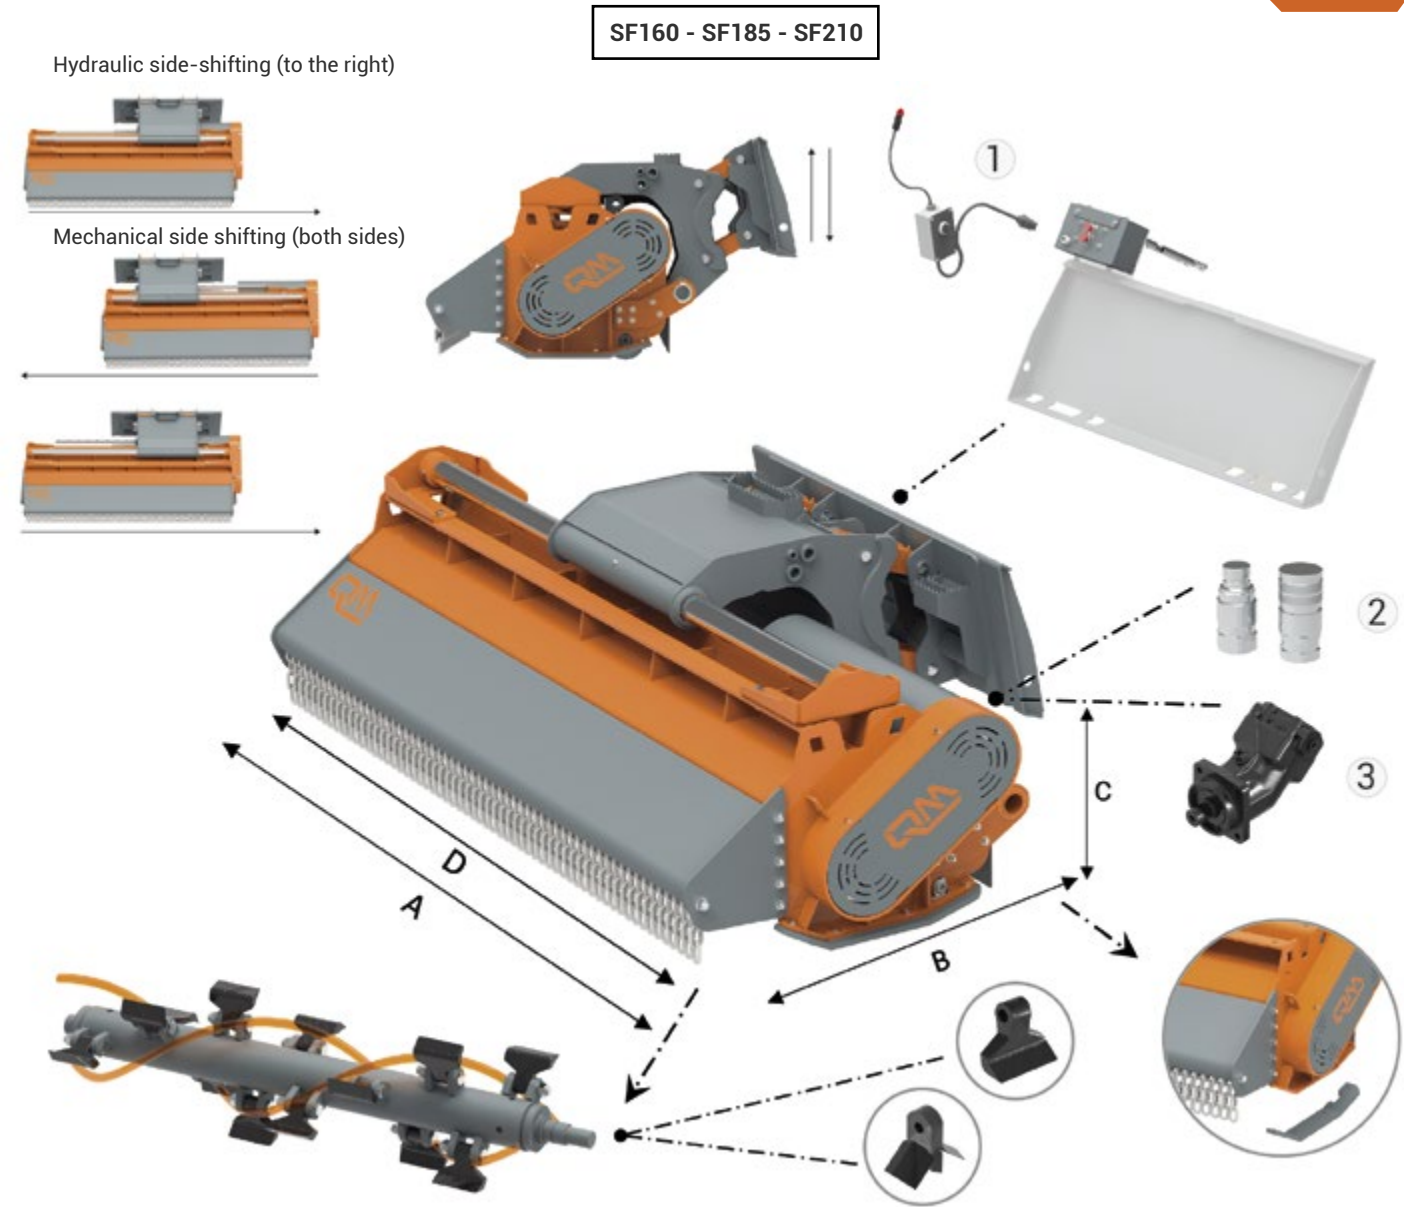

OPTIONAL

1	HYDRAULIC SIDE-SHIFTING THROUGH 2 HOSES	£
	TRANSLATION KIT Allows sliding of the mulcher 400mm to the right (Starting from SF160 SF185 SF210)	858,00
2	FACCIA PIANA QUICK COUPLINGS **	£
	Connection size 1/2"	82,00
	Connection size 3/4"	192,00
	Connection size 1"	292,00
3	AXIAL PISTON ENGINE	£
	Axial Piston Engine	1735,00



** On demand it is possible to provide other quick couplings than those indicated above
All data are intended WITHOUT ATTACHMENT TO THE MACHINE