

SL RANGE



The SL Range Mulcher fit excavators from **0.8 to 4.0 tons**. Suitable for grass and shrub reclamation work, even in tight spaces, the **SL Range** has a compact and robust design making this mulcher versatile for both amateurs and professional jobs. Thanks to the integrated multifunction valve block, the mulcher does not require a drainage pipe up to 10 BAR maximum counter-pressure.




STANDARD TECHNICAL FEATURES

- Compact and robust design
- Frame with double cavity bottom, reinforced up to the point of connection with the front chains for greater impact resistance
- Spherical roller bearings better protected from impurities thanks to a labyrinth of special seals.
- Shaft with blades or hammers with fixed supports for a better shredding of the materials.
- Spiral-mounted tools for a better cutting performance
- Direct Transmission
- Flow control valve - shock proof valve – anti-cavitation valve – max pressure (it does not require drainage pipe)
- The shaft can be equipped with hammers or Y-shaped blades
- Internal toothed bar that helps to chop the material
- Rear blade in rubberized, multi-layered, and tear-proof canvas
- Support roller with through shaft for greater resistance
- Protection devices in compliance to current European Regulation according to CE norms.

MODEL		SL50	SL70	SL90
Machine	(ton)	0.8/1.8	1.8/3.0	3.0/4.0
Oil flow rate	(l/min)	12/24	18/35	25/40
Max Pressure	(bar)	250	250	250
A	(mm)	680	880	1080
B	(mm)	645	645	645
C	(mm)	360	360	360
D (Total Cutting Width)	(mm)	500	700	900
Weight	(Kg)	90	105	120
Transmission		direct	direct	direct
Blades/Hammers Std	(n°)	10	14	18
Ø cutting (Max)	(cm)	4	4	4
Price	£	2428,00	2528,00	2643,00

All pricing is subject to VAT - Although the information in this price list is presented in good faith and believed to be correct at the time of printing, QM srl makes no representations or warranties as to the completeness or accuracy of the information. QM srl has no liability for any errors or omissions in the materials.

Mulchers - SL range

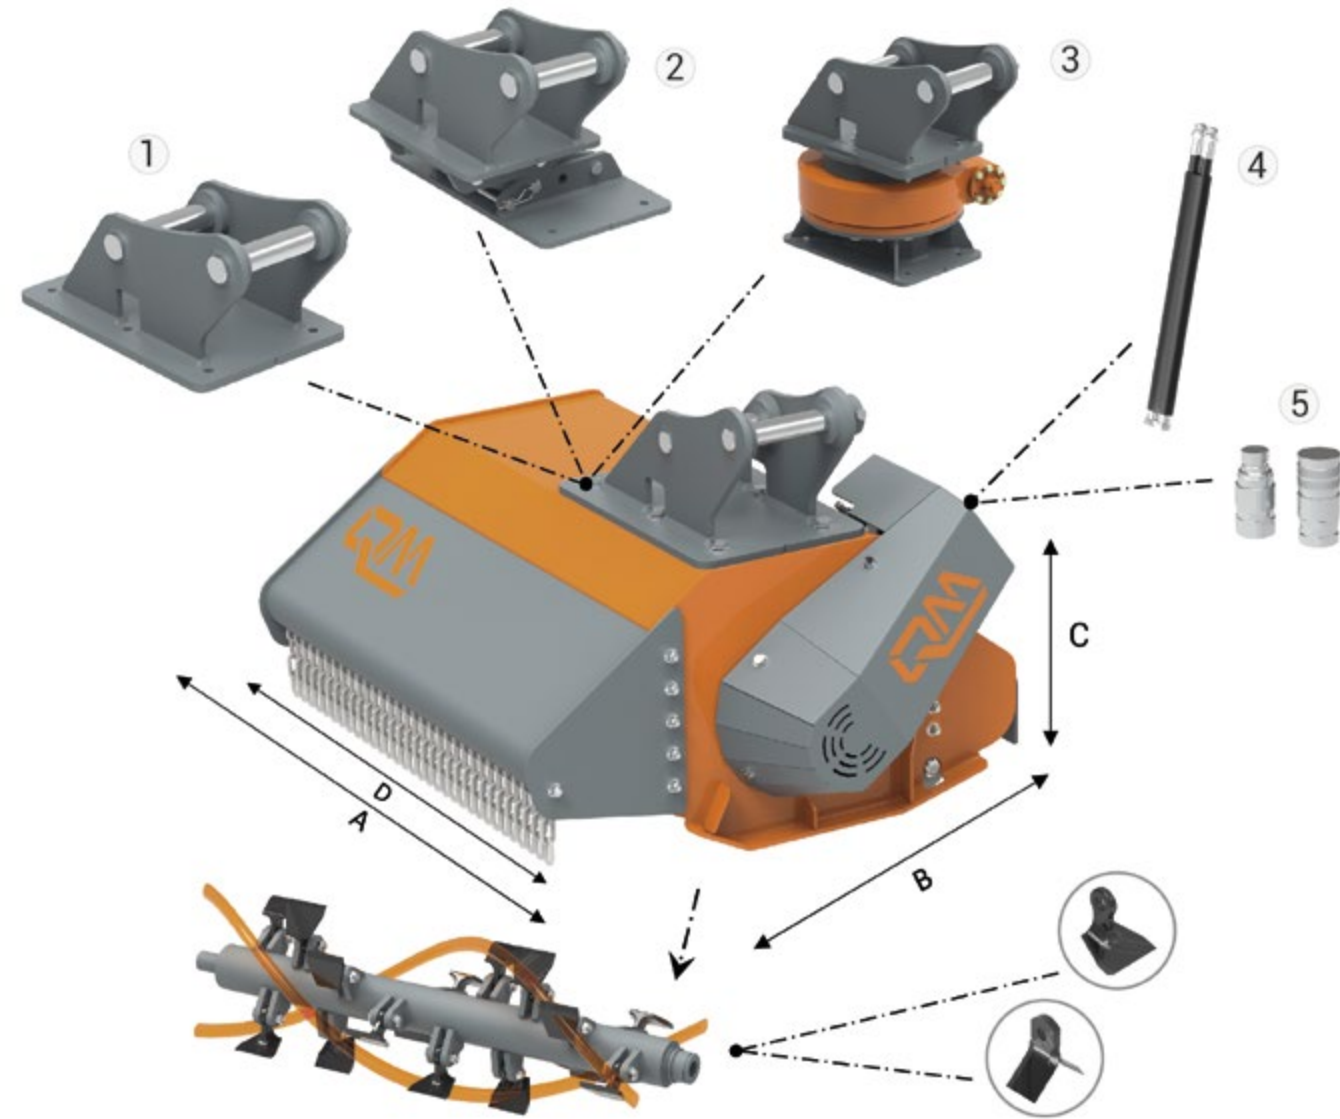

OPTIONAL

1	DIRECT COUPLING (pins)	£
	Excavators 0.8 / 1.8 ton	200,00
	Excavators 1.8 / 3.0 ton	215,00
	Excavators 3.0 / 4.0 ton	239,00
2	FLOATING	£
	AF1 - Kg22	279,00
3	KIT IDRAULIC ROTATION	£
	Hydraulic Rotation	2335,00

4	HYDRAULIC LINE KIT *	£
	Pipe 3/8" L=1500mm	89,00
	Pipe 1/2" L=1500mm	106,00
5	FACCIA PIANA QUICK COUPLINGS **	£
	Connection size 3/8"	60,00
	Connection size 1/2"	82,00

* On demand it is possible to provide different lengths out of standard ones
** On demand it is possible to provide other quick couplings than those indicated above
All data are intended WITHOUT ATTACHMENT TO THE MACHINE