

SM RANGE

The Mulcher SM Range fit excavators from **3.5 to 8.0 tons**. Suitable for reclamation jobs on grass and shrubs even in tight spaces, the **SM Range** has a compact and robust design making this mulcher versatile for different fields of activity such as Constructions and maintenance of green areas (Public and Private). Thanks to the integrated multifunction valve block, the mulcher does not require a drainage pipe up to 10 BAR maximum counter-pressure.




STANDARD TECHNICAL FEATURES

- Compact and robust design
- Frame with double cavity bottom, reinforced up to the point of connection with the front chains for greater impact resistance
- Spherical roller bearings better protected from impurities thanks to a labyrinth of special seals.
- Shaft with blades or hammers with fixed supports for a better shredding of the materials.
- Spiral-mounted tools for a better cutting performance
- Direct Transmission
- Flow control valve - shock proof valve – anti-cavitation valve – max pressure (it does not require drainage pipe)
- The shaft can be equipped with hammers or Y-shaped blades
- Internal toothed bar that helps to chop the material
- Rear blade in rubberized, multi-layered, and tear-proof canvas
- Support roller with through shaft for greater resistance
- Wear-resistant and replaceable skids
- Protection devices in compliance to current European Regulation according to CE norms.

MODEL		SM90	SM110	SM130
Machine	(ton)	3.5 / 5.0	5.0 / 6.0	6.0 / 8.0
Oil flow rate	(l/min)	35 / 60	45 / 70	50 / 80
Max Pressure	(bar)	250	250	250
A	(mm)	1130	1330	1530
B	(mm)	785	785	785
C	(mm)	460	460	460
D (Total Cutting Width)	(mm)	900	1100	1300
Weight	(Kg)	215	240	265
Transmission		direct	direct	direct
Blades/Hammers Std	(n°)	12	14	18
Ø cutting (Max)	(cm)	8	8	8
Price	£	2856,00	3018,00	3213,00

Mulchers - SM range

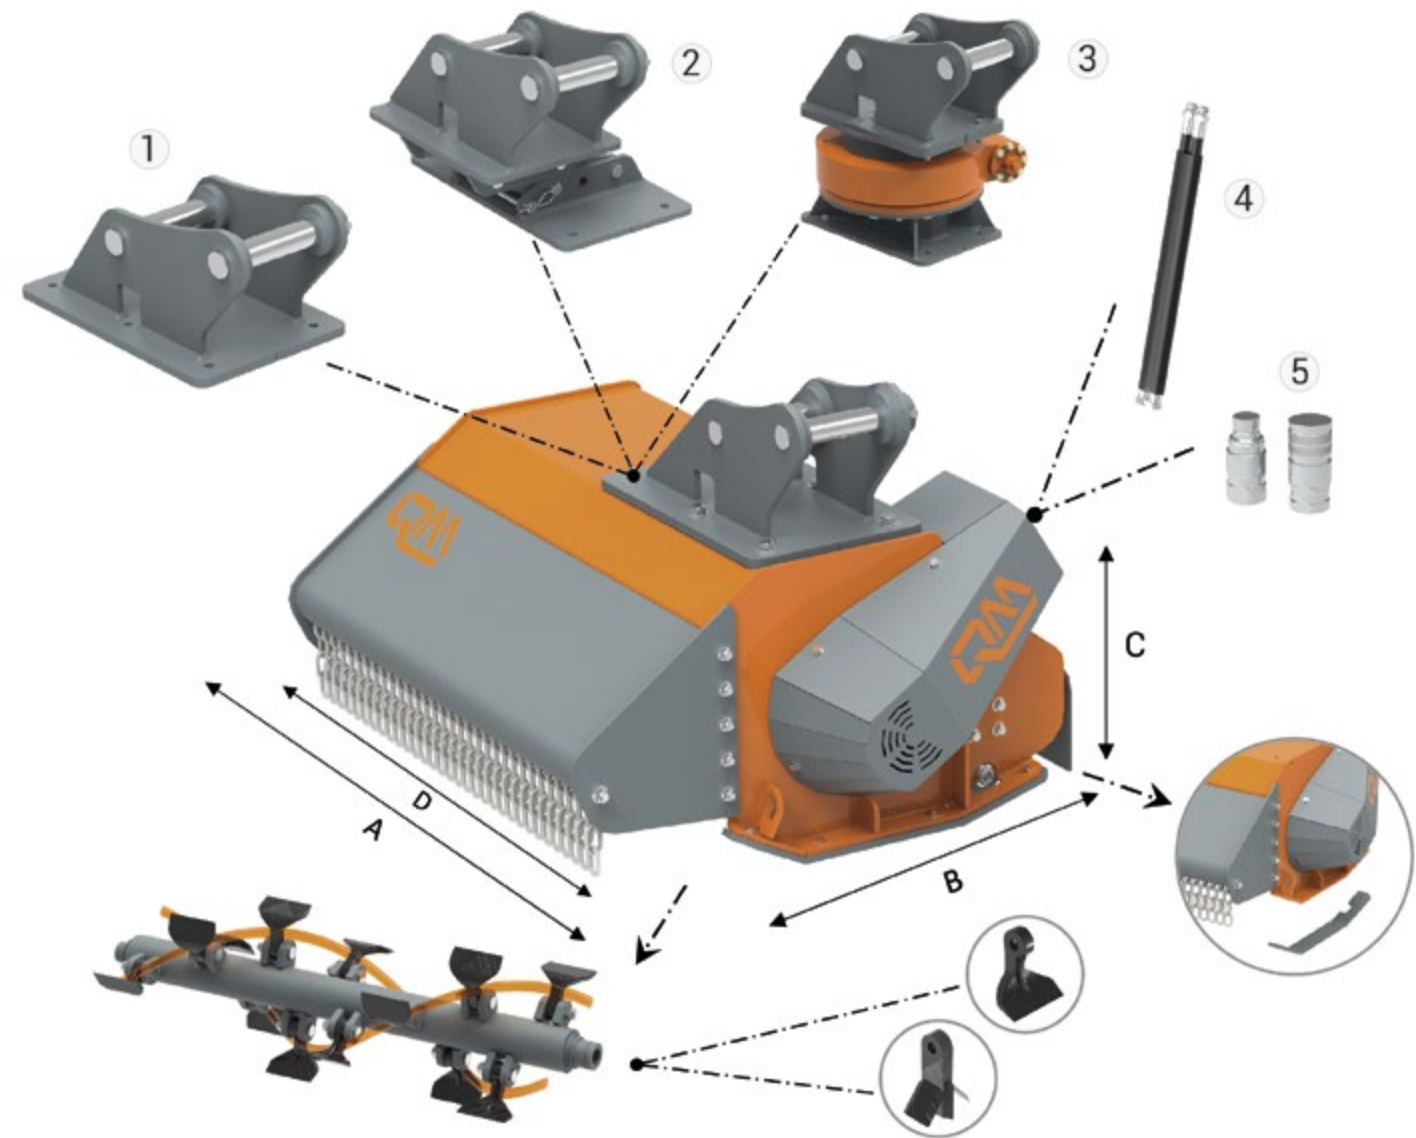

OPTIONAL

1	DIRECT COUPLING (pins)	£	3	KIT IDRAULIC ROTATION	£
	Excavators 3.0 / 4.0 ton	240,00		Hydraulic Rotation	2370,00
	Excavators 4.0 / 5.0 ton	270,00			
	Excavators 5.0 / 6.0 ton	308,00	4	HYDRAULIC LINE KIT *	£
	Excavators 6.0 / 8.0 ton	355,00		Pipe 1/2" L=2000mm	123,00
				Pipe 3/4" L=2000mm	153,00
2	FLOATING	£	5	FACCIA PIANA QUICK COUPLINGS **	£
	AF1 - Kg22	386,00		Connection size 1/2"	82,00
				Connection size 3/4"	192,00

* On demand it is possible to provide different lengths out of standard ones
 ** On demand it is possible to provide other quick couplings than those indicated above
 All data are intended WITHOUT ATTACHMENT TO THE MACHINE

