

SR RANGE

The **SR Range** Mulcher fit excavators from **4.0 to 14.0 tons**. Built with wear-resistant and high-quality materials, SR Range has a compact and robust body which guarantees high productivity combined with resistance to impact and wear, making it suitable for professional uses. The compact design allows the use of this mulcher even in tight spaces. Thanks to the integrated multifunction valve block, the mulcher does not require a drainage pipe up to 10 BAR maximum counter-pressure.




STANDARD TECHNICAL FEATURES

- Compact and robust design
- Frame with double cavity bottom, reinforced up to the point of connection with the front chains for greater impact resistance
- Spherical roller bearings better protected from impurities thanks to a labyrinth of special seals.
- Adjustable attachment position
- Shaft with blades or hammers with fixed supports for a better shredding of the materials.
- Spiral-mounted tools for a better cutting performance
- Toothed V-belt transmission with customizable transmission ratio
- Flow control valve - shock proof valve – anti-cavitation valve – max pressure (it does not require drainage pipe)
- The shaft can be equipped with hammers or Y-shaped blades
- Internal toothed bar that helps to chop the material
- Rear blade in rubberized, multi-layered, and tear-proof canvas
- Support roller with through shaft for greater resistance
- Wear-resistant and replaceable slides
- Protection devices in compliance to current European Regulation according to CE norms.

MODEL		SR90	SR110	SR130	SR160
Machine	(ton)	4.0 / 6.0	6.0 / 10.0	10.0 / 12.0	12.0 / 14.0
Oil flow rate	(l/min)	45 / 90	60 / 110	70 / 120	90/140
Max Pressure	(bar)	250	250	250	250
A	(mm)	1050	1250	1470	1770
B	(mm)	815	815	815	815
C	(mm)	550	550	550	550
D (Total Cutting Width)	(mm)	900	1100	1300	1600
Weight	(Kg)	355	395	475	555
Transmission		3 Belts	3 Belts	3 Belts	3 Belts
Blades/Hammers Std	(n°)	10	12	14	16
Ø cutting (Max)	(cm)	12	12	12	12
Price	£	4497,00	4759,00	5052,00	5513,00

All pricing is subject to VAT - Although the information in this price list is presented in good faith and believed to be correct at the time of printing, QM srl makes no representations or warranties as to the completeness or accuracy of the information. QM srl has no liability for any errors or omissions in the materials.

Mulchers - SR range

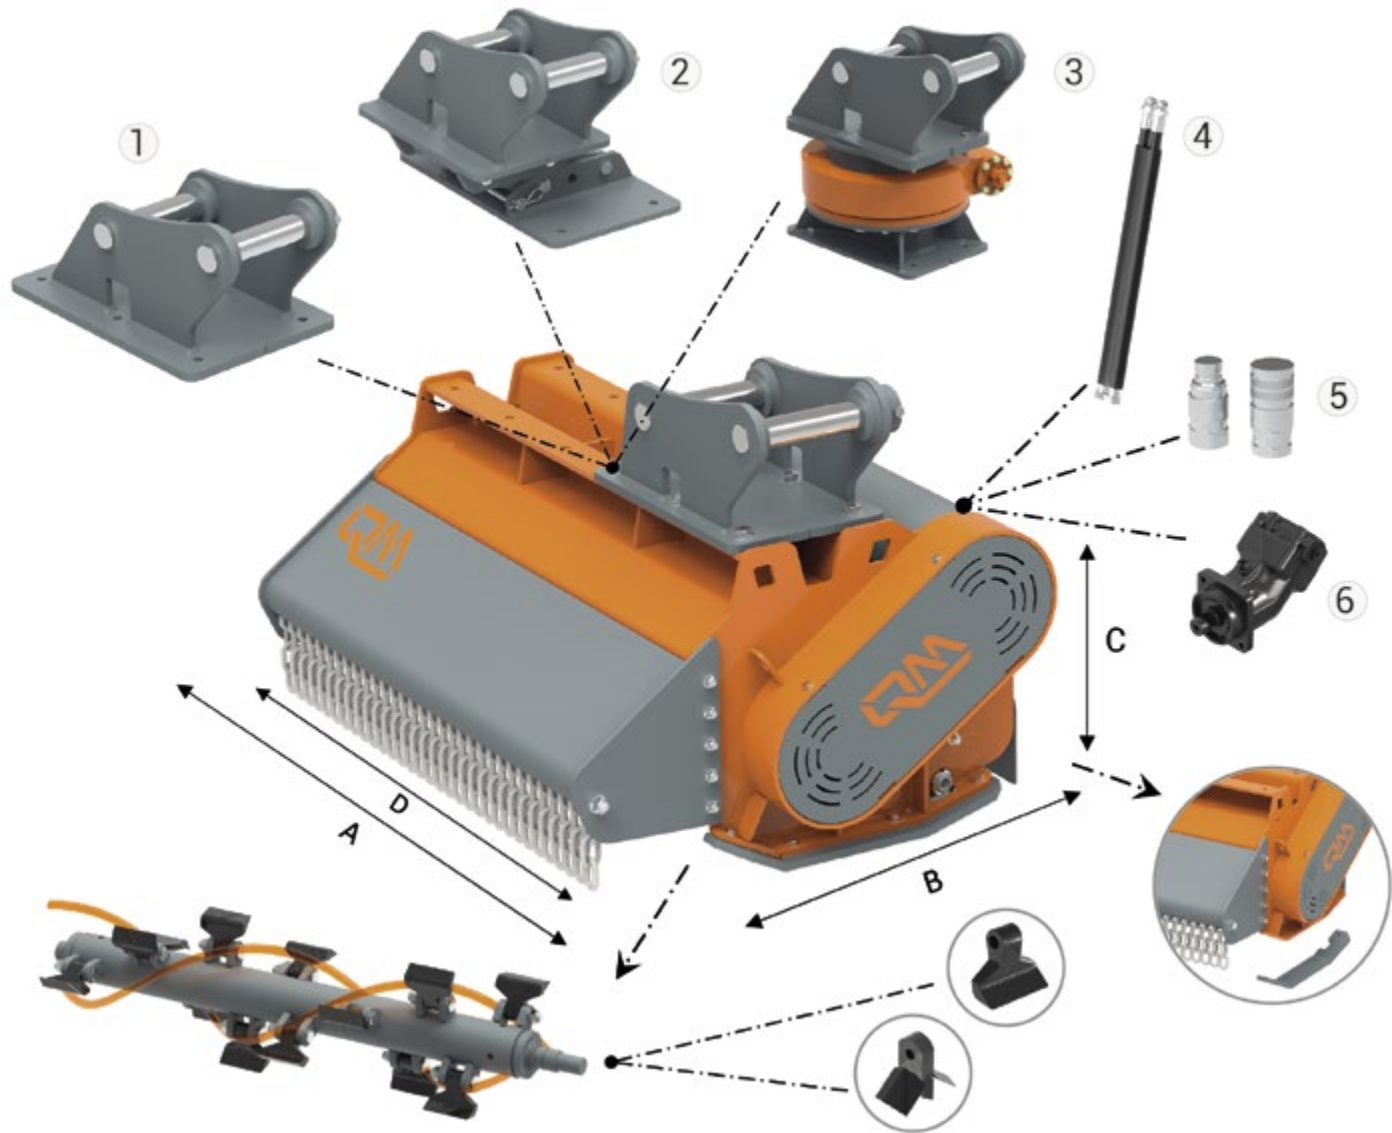

OPTIONAL

1 DIRECT COUPLING (pins)	£		
Excavators 4.0 / 5.0 ton		270,00	
Excavators 5.0 / 6.0 ton		309,00	
Excavators 6.0 / 8.0 ton		355,00	
Excavators 8.0 / 10.0 ton		409,00	
Excavators 10.0 / 12.0 ton		467,00	
Excavators 12.0 / 14.0 ton		533,00	
2 FLOATING	£		
AF2 (SR90 - SR110)	KG 42	386,00	
AF3 (SR130 - SR160)	KG 88	643,00	
3 KIT IDRAULIC ROTATION	£		
Hydraulic Rotation		2845,00	
4 HYDRAULIC LINE KIT *	£		
Pipe 1/2" L=2000mm		123,00	
Pipe 3/4" L=2000mm		153,00	
5 FACCIA PIANA QUICK COUPLINGS **	£		
Connection size 1/2"		82,00	
Connection size 3/4"		192,00	
6 AXIAL PISTON ENGINE	£		
Axial Piston Engine		1736,00	

* On demand it is possible to provide different lengths out of standard ones
 ** On demand it is possible to provide other quick couplings than those indicated above
 All data are intended WITHOUT ATTACHMENT TO THE MACHINE

